


ELETTRODRAGO AVANT



- Front with "AVANT" type design
- Totally independent chambers
- Mass ceramic electric elements
- Maximum working temperature 350°
- New Hybrid Control 5" panel for each room with centralized USB connection
- Trizone dynamic control system (TZS) mouth zone, center zone and rear zone, with mouth temperature regulation by dedicated probe
- Power distributor included
- Automatic start/stop daily and weekly included
- Dynamic QR-Code of anomalies diagnosis
- Steamer for each chamber with timed electrovalve
- Doors with low emission dismountable glass
- New lighting system with 2 lights for each room (furnaces width 84 - 1 light), positioned in the mouth of easy replacement
- Baking plates in "armored concrete"
- Electric board accessible from the front for easy maintenance (5-chamber ovens: electric board above the oven or hanging)
- Anticorrosion kit (i.e. steam generators heads and connecting pipes)
- Hood with one speed exhaust fan
- Removable hood grid in stainless steel

<i>Power inlet</i>	400/3N~/50
<i>Water inlet</i>	Ø 1/2" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Steam exhaust output</i>	Ø 250 mm *

* Minimum diameter pipe exhaust fumes 200 mm.

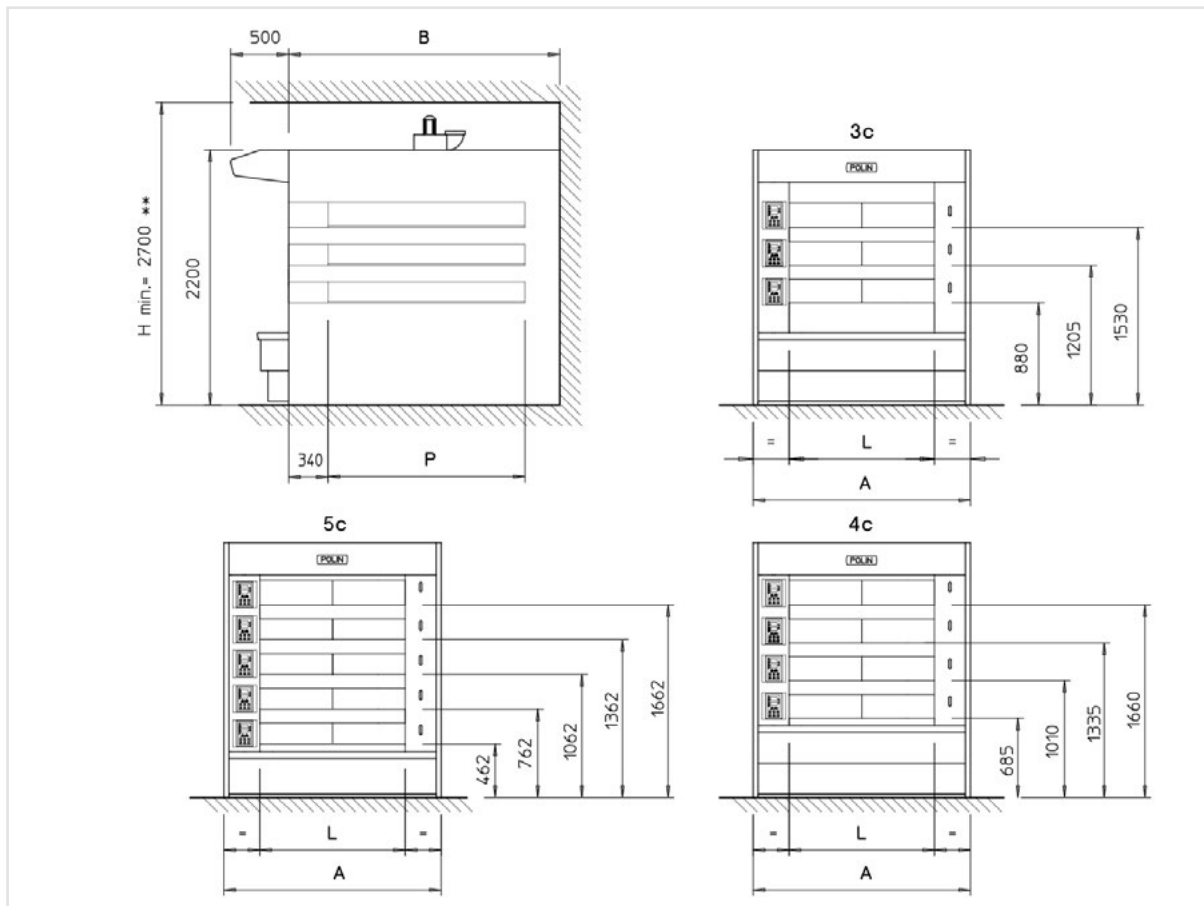

	Chambers	Useful dimension chambers		Overall dimensions		Installed power			
		Width	Depth	Width	Depth	Electric system calculator	With computer-economizer	With computer economizer for bakery manag.	Super power with steamers for electric system calc.
	n°	L mm	P mm	A mm	B mm	kW	kW	kW	kW
3,2/84x126-3	3	840	1260	1475	1900	22,9	17,7	8,5	35,1
4,2/84x126-4	4	840	1260	1475	1900	30,2	23,0	12,0	46,4
5,3/84x126-5	5	840	1260	1475	1900	37,4	30,2	20,0	57,7
4,3/84x170-3	3	840	1700	1475	2340	27,9	21,5	11,0	43,6
5,7 / 84x170-4	4	840	1700	1475	2340	36,0	27,9	15,0	57,7
7,1 / 84x170-5	5	840	1700	1475	2340	45,7	36,8	23,5	71,8
5,4 / 84x214-3	3	840	2140	1475	2780	33,1	25,6	13,0	54,0
7,2 / 84x214-4	4	840	2140	1475	2780	43,7	33,1	17,0	71,6
9,0 / 84x214-5	5	840	2140	1475	2780	54,4	43,7	28,0	89,2
6,5 / 84x258-3	3	840	2580	1475	3220	38,3	30,8	15,0	64,4
8,7 / 84x258-4	4	840	2580	1475	3220	50,7	38,3	20,0	85,5
10,8 / 84x258-5	5	840	2580	1475	3220	63,1	50,7	32,5	106,6

	Chambers	Useful dimension chambers		Overall dimensions		Installed power			
		Width	Depth	Width	Depth	Electric system calculator	With computer-economizer	With computer economizer for bakery manag.	Super power with steamers for electric system calc.
	n°	L mm	P mm	A mm	B mm	kW	kW	kW	kW
4,7 / 124x126-3	3	1240	1260	1875	1900	26,2	20,2	11,0	40,9
6,2 / 124x126-4	4	1240	1260	1875	1900	34,5	26,2	15,0	54,1
7,8 / 124x126-5	5	1240	1260	1875	1900	42,8	34,5	24,0	67,3
6,3/124x170-3	3	1240	1700	1875	2340	31,9	24,4	14,0	50,8
8,4/124x170-4	4	1240	1700	1875	2340	42,1	31,9	18,0	67,3
10,5/124x170-5	5	1240	1700	1875	2340	52,3	42,1	27,0	83,8
8,0/124x214-3	3	1240	2140	1875	2780	38,2	30,7	18,0	63,4
10,6/124x214-4	4	1240	2140	1875	2780	50,5	38,2	23,0	84,1
13,3/124x214-5	5	1240	2140	1875	2780	63,8	50,5	32,0	104,8
9,6/124x258-3	3	1240	2580	1875	3220	44,5	37,0	21,0	76,0
12,8/124x258-4	4	1240	2580	1875	3220	58,9	44,5	28,0	100,9
16,0/124x258-5	5	1240	2580	1875	3220	73,3	58,9	37,5	125,8
8,0/156x170-3	3	1560	1700	2195	2340	36,8	29,3	18,0	59,8
10,6/156x170-4	4	1560	1700	2195	2340	48,7	36,8	22,0	79,3
13,3/156x170-5	5	1560	1700	2195	2340	60,5	48,7	31,0	98,8
10,0/156x214-3	3	1560	2140	2195	2780	44,5	37,0	21,0	75,1
13,5/156x214-4	4	1560	2140	2195	2780	58,9	44,5	28,0	99,7
16,7/156x214-5	5	1560	2140	2195	2780	73,3	58,9	37,5	124,3
12,0/156x258-3	3	1560	2580	2195	3220	52,1	44,6	25,0	90,4
16,0/156x258-4	4	1560	2580	2195	3220	69,1	52,1	33,0	120,1
20,1/156x258-5	5	1560	2580	2195	3220	86,1	69,1	44,0	149,8
9,4/186x170-3	3	1860	1700	2500	2340	38,5	31,0	20,0	62,8
12,5/186x170-4	4	1860	1700	2500	2340	50,9	38,5	25,0	83,3
15,8/186x170-5	5	1860	1700	2500	2340	63,3	50,9	32,5	103,8
12,0/186x214-3	3	1860	2140	2500	2780	46,6	39,1	24,0	79,0
16,0/186x214-4	4	1860	2140	2500	2780	61,7	46,6	33,0	104,9
19,9/186x214-5	5	1860	2140	2500	2780	76,8	61,7	39,0	130,8
14,0/186x258-3	3	1860	2580	2500	3220	54,7	47,2	29,0	95,2
19,0/186x258-4	4	1860	2580	2500	3220	72,5	54,7	39,0	126,5
24,0/186x258-5	5	1860	2580	2500	3220	90,3	72,5	46,0	157,8

	Chambers	Useful dimension chambers		Overall dimensions		Installed power			
		Width	Depth	Width	Depth	Electric system calculator	With computer-economizer	With computer economizer for bakery manag.	Super power with steamers for electric system calc.
	n°	L mm	P mm	A mm	B mm	kW	kW	kW	kW
11,9/234x170-3	3	2340	1700	2980	2340	45,7	38,2	24,0	76,0
15,9/234x170-4	4	2340	1700	2980	2340	60,6	45,7	32,0	100,9
19,9/234x170-5	5	2340	1700	2980	2340	75,4	60,6	40,0	125,8
15,0/234x214-3	3	2340	2140	2980	2780	55,8	48,3	28,0	96,1
20,0/234x214-4	4	2340	2140	2980	2780	74,0	55,8	39,0	127,7
25,1/234x214-5	5	2340	2140	2980	2780	92,2	74,0	48,0	159,4
18,1/234x258-3	3	2340	2580	2980	3220	65,9	58,4	33,0	116,0
24,1/234x258-4	4	2340	2580	2980	3220	87,4	65,9	45,0	154,6
30,2/234x258-5	5	2340	2580	2980	3220	109,0	87,4	56,0	193,0
12,6/248x170-3	3	2480	1700	3125	2340	47,1	39,2	25,0	77,8
16,8/248x170-4	4	2480	1700	3125	2340	61,9	47,1	32,0	103,3
21,0/248x170-5	5	2480	1700	3125	2340	77,0	61,9	41,0	128,8
16,0/248x214-3	3	2480	2140	3125	2780	57,1	49,6	29,0	98,5
21,2/248x214-4	4	2480	2140	3125	2780	75,7	57,1	39,0	130,9
26,5/248x214-5	5	2480	2140	3125	2780	94,3	75,7	49,0	163,3
19,2/248x258-3	3	2480	2580	3125	3220	67,4	60,0	34,0	119,2
25,6/248x258-4	4	2480	2580	3125	3220	89,5	67,4	46,0	158,5
32,0/248x258-5	5	2480	2580	3125	3220	111,5	89,5	57,0	197,8